






Lamina S-max EOCT Series Indoor Led Display

Lamina S-max EOCT series

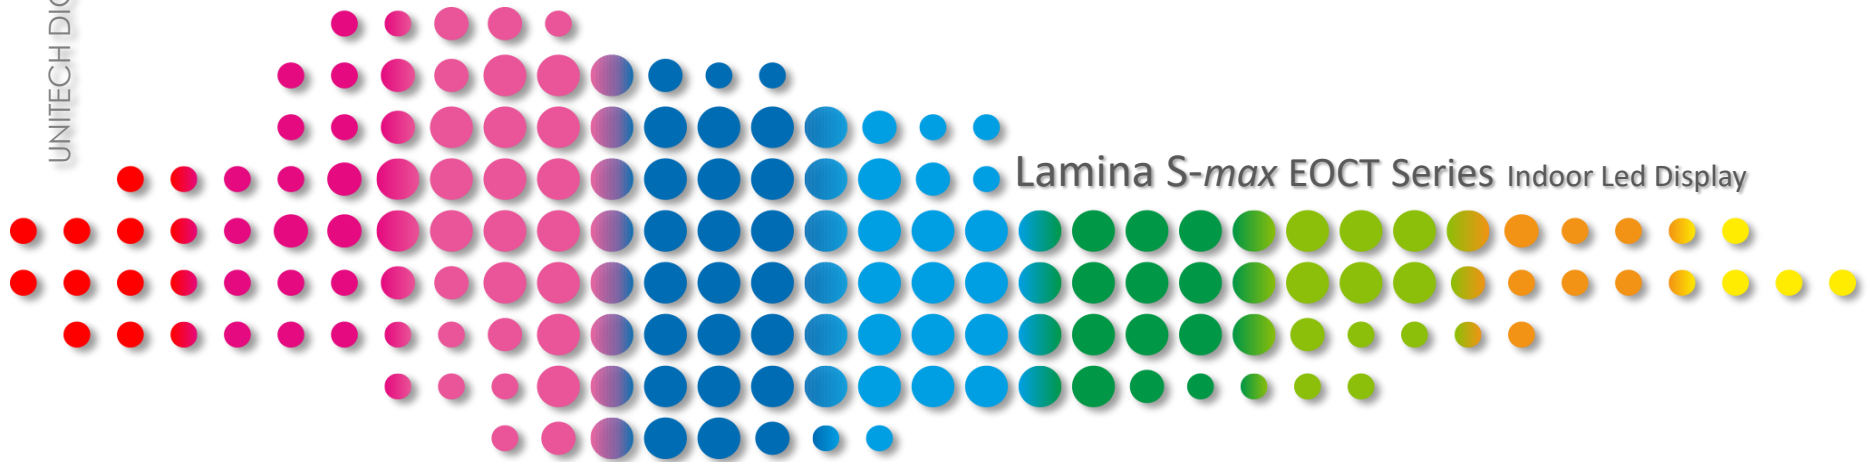

INTRODUCTION

For top-tier visual performance and value, the second generation of the Lamina's series boasts feature-rich professional functionalities tailored for meeting rooms and signage applications.

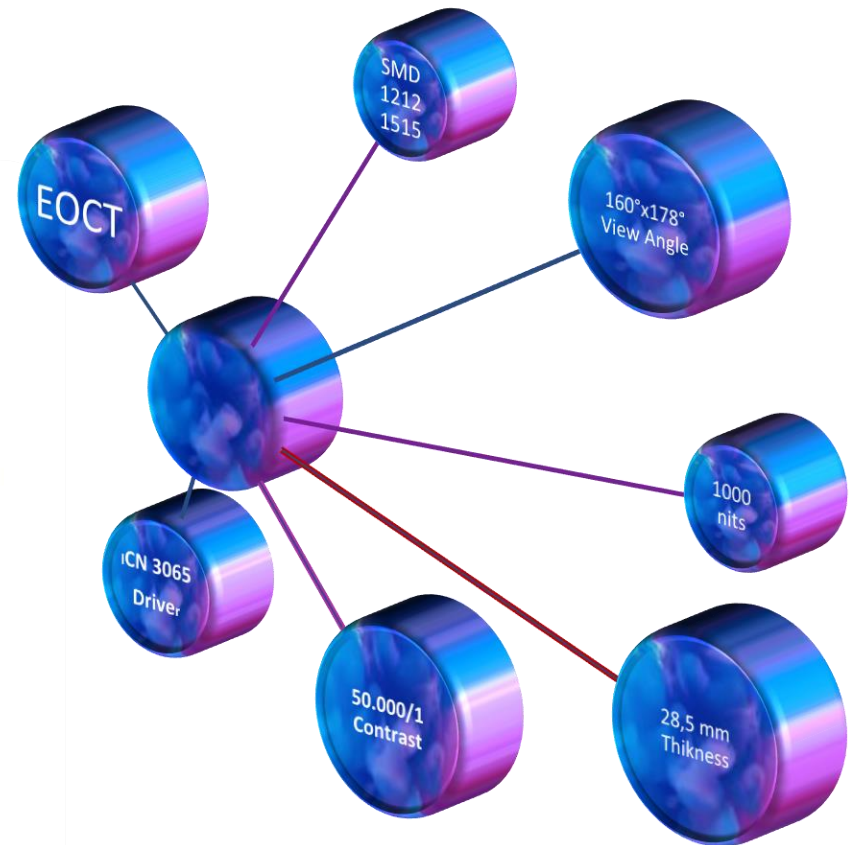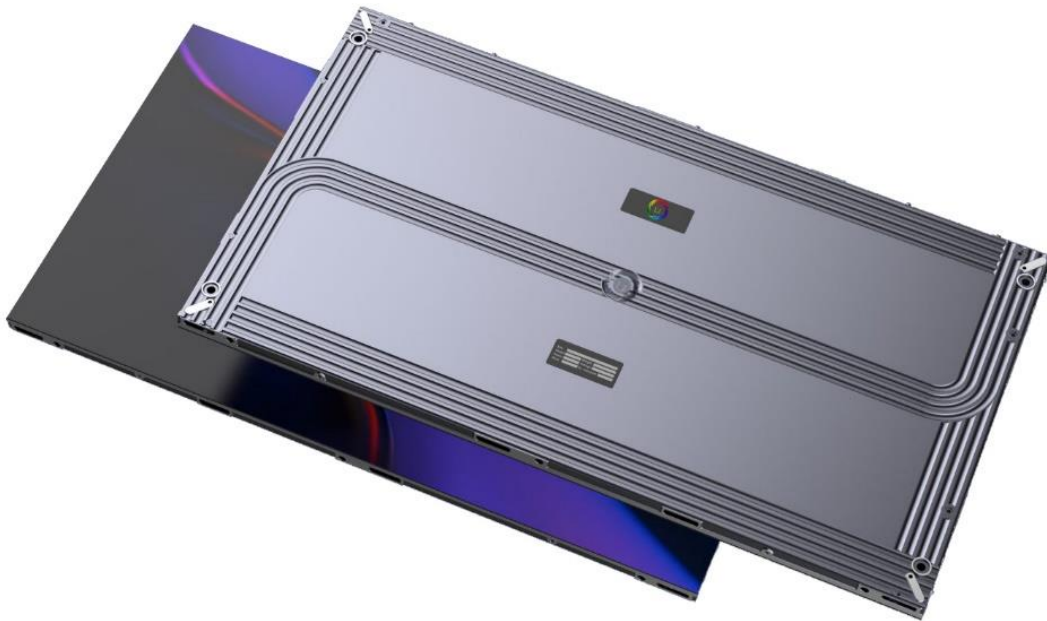

Lamina S-max EOCT series




16/9 RATIO DESIGN



DIFFERENT SHAPES DIFFERENT SIZES

The Unitech Digital Media Lamina S Msx, with a 16/9 ratio panel, native wireless and local connectivity, and rapid input detection, captivates corporate users for its simplicity.

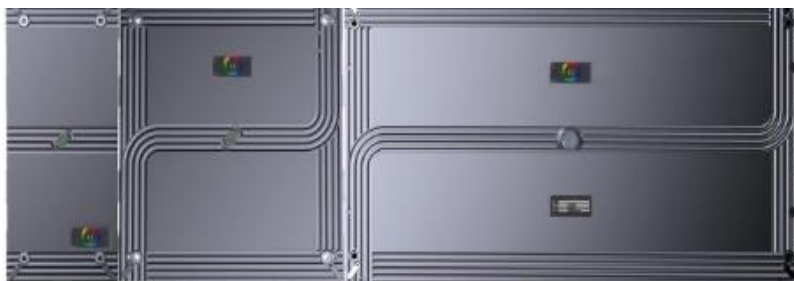


AVAILABLE CABINETS SIZE

1.000*562,5mm
500*562,5mm
250*562,5mm
250*250*562,5mm Corner


Lamina S-max EOCT series




MULTIPLE INSTALLATION STYLE



Wall mounting



Truss Rigging



Ground Rigging

Experience super thin panels , front service access and EOCT strong led surface protection that ensure durability and clean proof surface.

Easy installation over wall, stand alone, ground rigging, truss rigging


Weight reduced to the essential, thin as no one, for stilish , sleek design.

Avialable the side frame to complete the high tech clean design.

Lamina S-max EOCT series





POWER & SIGNAL REDUNDANCY

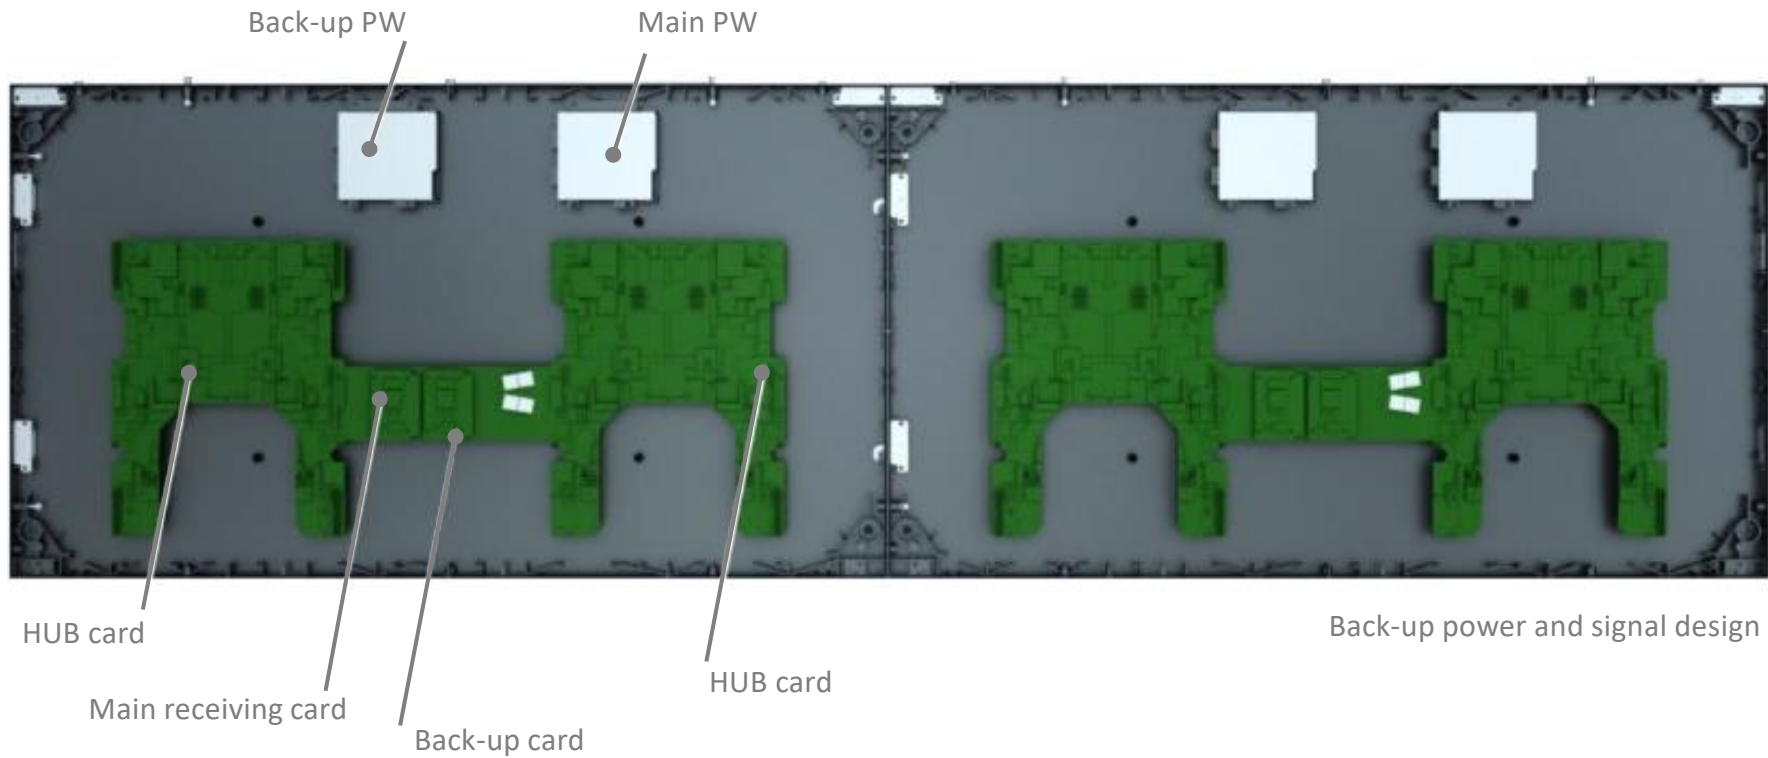

Lamina S-max EOCT series



EOCT EPOXI OPTICAL COTING TECHNOLOGY



TECHNOLOGY

EOCT is a new technology, an innovative sealing on the surface of led's modules using an optical degree epoxy sealant: a great protection from water, dust and damage for leds pixels. over increasing contrast and view angle.

WATERPROOF, SHOCK AND DUST PROOF

EOCT Compared with traditional SMD, it is characterized by high protection, over moisture, waterproofing, anti-collision and moderated anti-UV protection.

WIDER ANGLE VIEW, IMPROVED PIXEL-FREE VISION

Compared to GOB technology, it features easier maintenance and lower cost, wider viewing angle (178°)

Lamina S-max EOCT series



Order Code	LMNSmax 1.5 EOCT	LMNSmax 1.9 EOCT	LMNSmax 2.6 EOCT
LED Type	SMD1010	SMD1212	SMD 1515
Pixel Pitch	1.5mm	1.9mm	2.6mm
Pixel Density	409,600 dot/m	262,144 dot/m	147,456 dot/m
Module Resolution	160*180px	128*144px	96*108px
Module Size	250*281.25mm	250*281.25mm	250*281.25mm
Module weight	0,5 Kg	0,5 Kg	0,5 Kg
Module Thicknees	3mm	3mm	3mm
Average Module Power consumption	35 W	28 W	28 W
Drive Mode	Constant current	Constant current	Constant current
Vertical Viewing Angle	140°	140°	140°
Horizontal Viewing Angle	178°	178°	178°
Brightness	800cd/mq	1000cd/mq	1000cd/mq
Grey Scale	15 bit	15 bit	15 bit
Refresh Rate	≥3840 HZ	≥3840 HZ	≥3840 HZ
Max Power consumption	435W W/mq	435W W/mq	400W W/mq
Average Power consumption	130W W/mq	130W W/mq	120W W/mq
Cabinet Size	1.000*562,5mm / 500*562,5mm / 250*562,5mm /250+250x562,5mm Corner		
Cabinet Weight	11,7 Kg	11,7 Kg	11,7 Kg
Cabinet Thickness	28,5mm	28,5mm	28,5mm
Contrast		100000/1	
Dynamic range		SDR/HDR	
Input Voltage		110-220V/200-240V	
Working Temperature		-20~+40°C	
Storage Temperature		-40~+80°C	
Operation humidity		10%~90%RH	
Level of Protection		IP20	
Installation Method		Front service	
Radius of bending		3°~15° with custom holder	
Certilfcates		CE (EMC A, LVD) , FCC, ETL	
Surface Protection.		EOCT	
EOCT Performance		DIN 55996-1	
Fireproofing Level		V0	
Service		24x7 Operation	

Lamina S-max EOCT series



Order Code	LMNSmax 2.6 EOCT- HBHC	LMNSmax 2.6 EOCT- HBLC
LED Type	Sinyopto SMD 1921 black	SMD 1921
Pixel Pitch	2.6 mm	2.6mm
Pixel Density	147,456 dot/mq	147,456 dot/mq
LED Configuration	1R1G1B	1R1G1B
Module Resolution	96*108px	96*108px
Module Size	250*281.25mm	250*281.25mm
Cabinet Size	1.000*562,5mm*28mm	
Cabinet Resolution	384*216px	
Maintainace	front	
Installation	fixed	
Cabinet Weight	10,5 Kg/pcs	
Brightness	2500 nits	3500 nits
Contrast	1000000/1	15000/1
Viewing Angle	140° (H.), 140° (V.)	
Minimum view distance	2.6mm	
Grey Scale	≥14 bit	
Scan	32	
Refresh Rate	≥3840 HZ	
Max Power consumption	462 W/mq	
Average Power consumption	160 W/mq	
Input Voltage /Frame Frequency	AC100-240V / 50Hz-75Hz	
Brightness adjustment	0-100%	
Gamma Correction	1-4	
Color temperature	6500-9000K	
Input Signal	S-Video, RGB, RGBHV, YUV, YC, Composition	
Operation System	Win7&XP	
Working Temperature / Operation humidity	-20-+40°C / 10%~90%RH	
Control Mode	Synchronization with PC	
Level of Protection	IP30	
Certilfcates	CE (EMC A, LVD) , FCC, ETL	
Surface Protection.	EOCT	
EOCT Performance	DIN 55996-1	
Fireproofing Level	V0	


Lamina S-max EOCT series




POSTER INSTALLATION


Single
installations

Multiple
installations

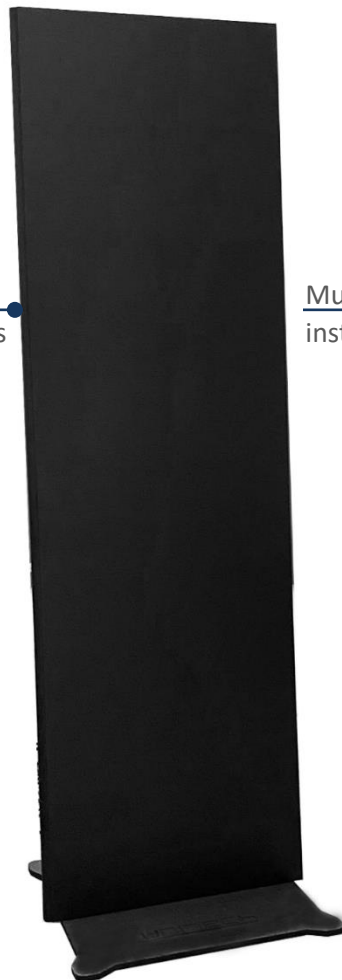

Lamina S-max EOCT series

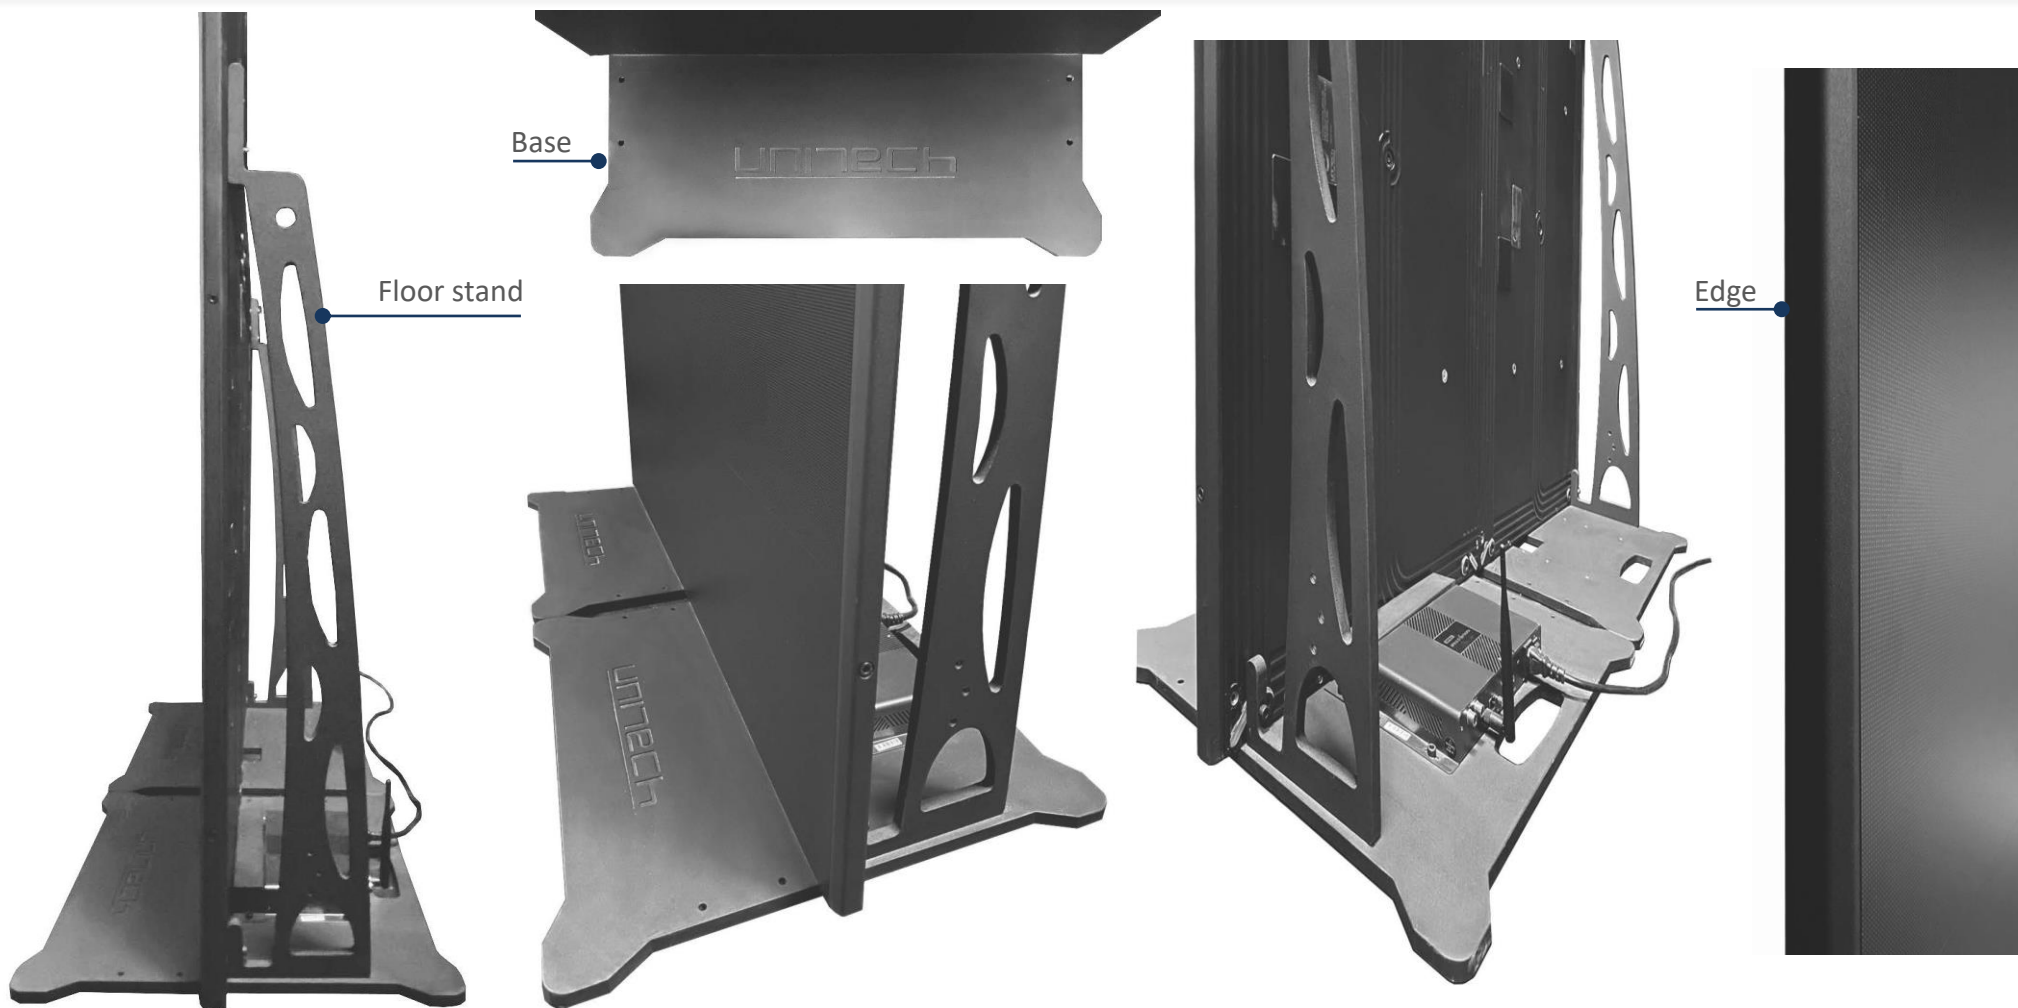

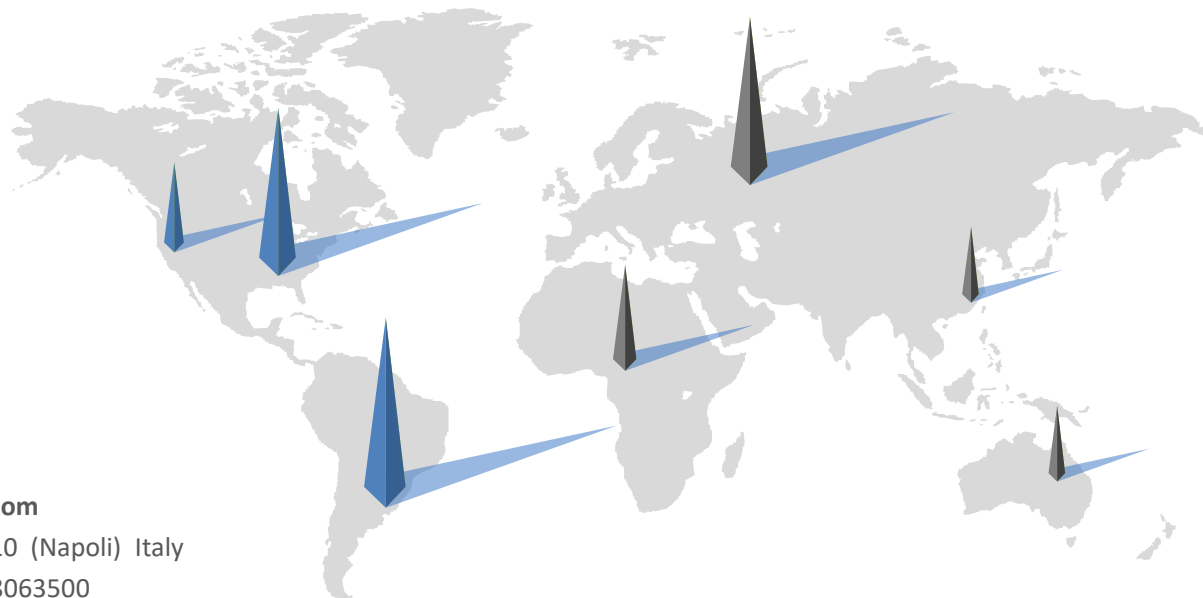

Head office

E-mail : info@unitechdigitalmedia.com

Add : Corso Italia 431A, Quarto 80010 (Napoli) Italy

Tel : +39 - 335-8010444 | +39 - 081-8063500

WEB: <https://unitechdigitalmedia.it>

<https://www.unitech.lighting>